

Digistat⁺1RF Room Thermostat



HEATING



Drayton's stylish new Digistat⁺1RF. Featuring large buttons and an easy to read large and clear digital display to show that the temperature has been set accurately.

- Simple on & off feature
- User adjustable Min/Max temperature setting
- User adjustable Set-back feature
- User adjustable comfort feature


The product can be configured with a minimum temperature setting to protect the vulnerable.

Digistat⁺1RF Room Thermostat


Features

- Easy to use - only 4 buttons
- Visual feedback via digital display
- Comfort feature
- Set-back feature
- Min/Max temperature setting
- Battery powered
- Part L compliant (Part J in Scotland)

Dimensions

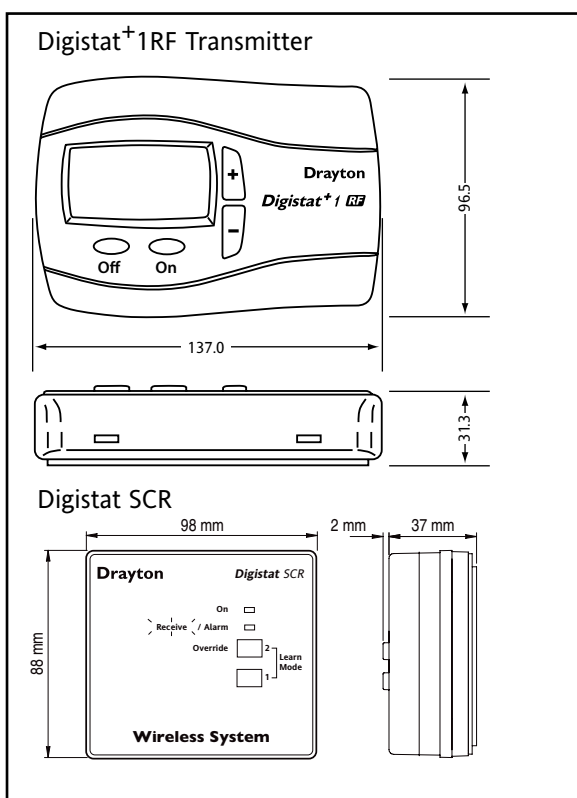

SCR Receiver wiring

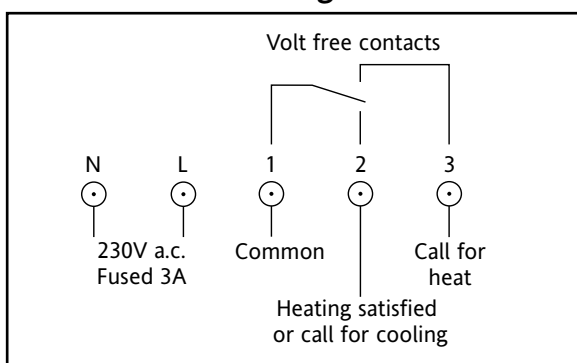

Technical Data

Digistat⁺1RF

Power supply:	2 x AA Size, 1.5V alkaline batteries
Radio frequency:	433 MHz
Radio Signal Range:	30m typically. The range may be affected by the composition / density and number of walls between the Digistat ⁺ 1RF and SCR.
Temperature Range:	5 to 30°C
Control Accuracy:	+ 0.5K @ 20°C
Ambient Temperature:	Operating 0°C to 40°C / Storage -20°C to 55°C
Mounting:	Suitable for surface or conduit box mounting
Wiring:	No wiring required

Digistat SCR

Power supply:	230V a.c.
Switch Type & Rating:	SPDT (voltage free) 2(1)A 230V a.c. or 24V a.c./d.c.
Wiring:	Designed for fixed wiring only, to comply with current IEE wiring regulations. (BS7671)
Reception Frequency:	433 MHz
Relevant EC Directives	2006/95/EC Low Voltage Directive 2004/108/EC Electromagnetic Compatibility Directive 1995/5/EC R&TTE Directive 2006/66/EC Battery Directive
Applied Standards:	EN60730-1; EN60730-2-9 ETSI EN 300 220-3; ETSI EN 301 489-3

Benefits of Wireless Systems

The Digistat⁺ Wireless System provides a cost effective solution to the problems encountered during the installation of a standard wired room thermostat.

Consider the benefits of a wireless thermostat:

- No carpets and floor-boards to lift
- No damage to wall coverings
- No unsightly surface wiring
- Positioning no longer restricted to areas accessible by cable runs
- No brick or plaster work to chase out
- No damage to fabrics and furnishings in the process.

Available from:

invenSYS
Controls

Customer Service Tel: 0845 130 5522
Customer Service Fax: 0845 130 0622
Technical Helpline Tel: 0845 130 7722
Email: customer.care@invensys.com
Website: www.draytoncontrols.co.uk



D99-2