

this product information has been extracted from

the fire collection

X1

Tel: 0845 600 5111

Fax: Customer Care: 01489 773053

Email: customer.services@glendimplex.com

Website: www.dimplex.co.uk

X1

- Canopy free fire – no protrusion from fan heater
- 1.5kW inset or freestanding fire with unique Optiflame® Plus effect
- Electronic thermostatic control giving highly accurate room temperature control
- Designed to fit 16" and 18" fireplaces and all conventional flues
- Fits flat-to-wall with 70mm spacer (included)
- Finished in black (model no. X1B) or silver effect with anthracite trim (model no. X1S)
- Manual or remote control giving armchair selection of on/off
- Coal and small white pebbles supplied as standard
- Flame effect can be used independently of heat source
- Model nos. X1B and X1S

Available Spring 07



X1 Silver with pebbles



Product Dimensions

Please see page 4



DIMPLEX

14



X1 SILVER with coals shown flat-to-wall using spacer provided

PLEASE NOTE

On models X1S and X1B because the heat outlet is concealed, precautions should be taken to ensure that users are aware of its location and that in operation the outlet and surrounding area will be very hot.



X1 BLACK with coals



DIMPLEX

15



X1 BLACK shown in OER surround


	Obsidian OBS20	Opima 314CHE	Pressada PRS20	Rectory REC20R	Roda ROD20	SP420	SP820	SP920	Springbome SBN20	Stockbridge SKG20	Theme 316CHE	Timra TMR15	Valencia VAL15	Wynford WYN20BR, WYN20CH	X1 Black X1B	X1 Silver X1S	Yeominster YEO20	Zamora ZAM20
PRODUCT FEATURES																		
Heat source:	✓		✓	✓	✓		✓		✓	✓		✓	✓	✓	✓	✓		✓
- Fan	✓																	
- Radiant / & convected		Radiant				✓		✓			✓						✓	
HEATSTREAM™ Technology																		
Heat exchanger																		
Choice of heat setting	✓	✓	✓	✓	✓		✓		✓	✓	✓	✓	✓	✓	Electronic stat	Electronic stat	✓	✓
Remote control	✓		✓	✓		✓	✓	✓		✓		✓	✓		✓	✓		
Thermostat / Economiser (Econ)		Econ		✓							Econ				✓	✓		
Fitted plug	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Flame effect independent of heat*	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
BEAB Approval ▲	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
FLAME / FUEL EFFECT																		
Optiflame® real coals (or coal effect)		Flicker		✓	✓				✓	✓	Flicker			✓	✓	✓		✓
Optiflame Elite log effect	✓		✓	✓						✓			✓					
Optiflame® log effect (or flicker log)						✓		✓									Flicker	
Optiflame® pebbles / white pebbles (WH)	✓WH		✓WH		✓		✓WH					✓WH			✓WH	✓WH		✓WH
COLOUR / FINISH																		
Black / Grey (G)	✓	+ cherry		✓				✓	✓	G	+ cherry				✓			
Black with polished aluminium																		✓ effect
Brass effect with complementary black														WYN 20BR				
Polished cast iron																		
Black with complementary brass effect (B) / chrome effect (C)																	B	C
Chrome effect / Satin silver effect ●														WYN 20CH				
Satin silver effect and grey ●●			●●			●	●●					●	●●			●●		
Stainless Steel effect/Stainless Steel effect with complementary brass effect**					✓													
Stone effect with black marble effect																		
TECHNICAL DETAILS																		
Type	WM	FS / WM	WM	FS	FS	WM	WM	WM	FS	FS	FS	INSET	INSET	INSET	INSET+FS	INSET+FS	FS	FS
Total output (kW)	2.0	2.0	2.0	2.0	2.0	0.4	2.0	0.4	2.0	2.0	2.8	1.5	1.5	2.0	1.5	1.5	2.0	2.0
Power consumption effect only (Watts)	140	120	140	100	75	300	140	300	130	130	130	130	130	75	130	130	60	130
PRODUCT DIMENSIONS[#](mm)																		
Height	605	540	738	665	617	664	675	696	545	640	610	575	655	617	582	582	395	665
Width	700	775	720	540	514	964	578	1010	440	620	775	444	700	514	519	519	631	603
Total depth (max)	145	215	145	375	220	170	181	168	310	390	265	225	218	200	197	197	214	226
Depth of inset (where applicable)	-	-	-	-	-	-	-	-	-	-	-	215	173~	50†	70	70	-	-

NOTES

- FS Free-standing
 - WM Wall Mounting Only
 - # For effective performance of some fires, certain minimum clearance criteria must be applied. Whilst we endeavour to manufacture our fires within strict tolerances, we reserve the right to make changes to the manufacturing process without prior warning, therefore we recommend you measure the fire prior to undertaking any irrevocable work on a fireplace or surround.
 - ▲ Range or model approved by BEAB or approval applied for at time of printing.
 - * Please note: Used in an environment where background noise is very low, it may be possible to hear the fan which operates the flame effect. This is normal and should not be a cause for concern.
 - † Inset depth using detachable spacer.
 - ~ See relevant product page for opening requirements
- All dimensions are shown in millimetres. Please allow +/- 5mm tolerance.

NOTES: see right of table

Detailed dimensions – Optiflame® electric inset fires#

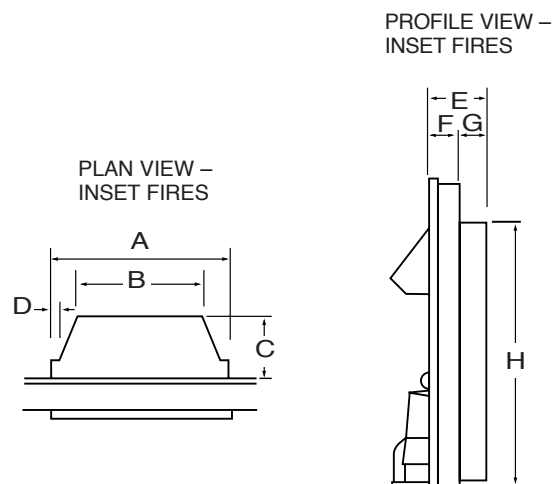


	A	B	C	D	E	F	G	H
Adagio	410	340	115	16	155	40	115	540
Ashington	410	340	115	16	140	85	55	540
Aspen	410	340	115	16	130	75	55	540
Avola	410	340	115	16	125	70	55	540
Chalbury	410	340	115	16	140	85	55	540
Danesbury	410	340	115	16	127	72	55	540
Elda	410	340	110	16	122	72	50	540
Horton	410	340	115	16	135	80	55	540
Longbourn	395	340	60	16	120	120	-	540
Michigan	410	340	110	16	131	76	55	540
Wynford	410	340	110	16	120	70	50	540
X1 / Exbury†	390	338	70	26	83	83	-	544

All dimensions are shown in millimetres.
Please allow +/- 5mm tolerance.

† Exbury dimensions subject to confirmation.

Surrounds

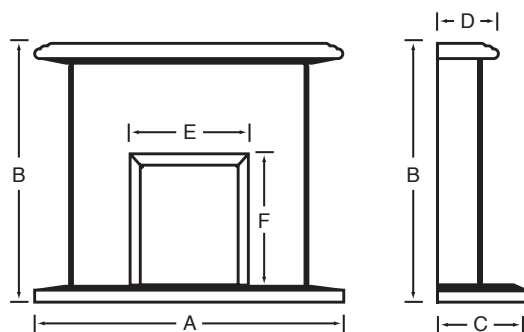

Surrounds	Model No.	Finish of Surround	Finish of Back Panel	A	B	C	D	E	F	Weight of Surround
Holwell	GDS1A	Maple effect	Black back panel & hearth	1200	1120	402	278	432	559	43kg
Ashmore	GDS1	Mahogany effect	Cream back panel & hearth	1200	1120	402	278	432	559	43kg
Rockbourne	GDS3	Natural stone effect	Natural stone effect panel & hearth	1200	1080	350	253	432	559	48kg

All dimensions in mm

After Sales Service

After sales service if required is absolutely no problem with Dimplex – we have a network of appointed Service Agents spread throughout the Country who are qualified and trained to repair or service any of our appliances.

A list of Service Agents is available on request.

CE Mark

Our products carry the CE mark complying with European safety standards and the European Standard for electro magnetic compatibility.

British Electrotechnical Approvals Board BEAB Approved

The mark of the British Electrotechnical Approvals Board signifies that the appliance bearing it has been produced to the stringent safety requirements for domestic electrical appliances as laid down in BSEN60335.

All Dimplex electric fires are approved by BEAB or awaiting approval at time of printing.

Specifications

Dimplex policy is one of continuous improvement; the Company therefore reserves the right to alter specifications without notice. Although every care has been taken in the reproduction of product finishes in this brochure, the colour photographs and the flame effects should be taken only as a guide. The information contained in this brochure is correct at the time of printing. You are advised to consult your dealer before purchasing.

The Dimplex Range

Dimplex offers the widest range of electric space and water heating products in the world – nearly 400 – to meet almost any heating need. In addition to this publication, we have a wide range of brochures for both domestic and commercial applications. Choose from:



Ascar electric boiler brochure




Commercial brochure



Range brochure



Developers brochure




Heat Pumps brochure



Water Heating brochure



Building regulations brochure



Portables brochure



Glen Dimplex UK Limited, Millbrook House, Grange Drive, Hedge End, Southampton, SO30 2DF.

Selected surrounds featured in this brochure were supplied by the companies listed below. Any surround not listed is no longer available.

Wynford	WYN20CH	Horton	HTN20CH	Adagio	ADG20
Wynford	WYN20BR	Elda	ELD20	Adagio	ADG20BR
Horton	HTN20BR			Chalbury	CHB20BR
Horton	HTN20BL			Chalbury	CHB20CH
				Danesbury	DAN20
				Michigan	MCN20*
				Timra	TMR15*
				Exbury	EBY15

Be Modern Group
Western Approach
South Shields
Tyne & Wear NE33 5QZ
Telephone: 0191 455 3571

Aristocratic Designs
43 Holbeck Lane
Holbeck, Leeds
West Yorkshire LS11 9UL
Telephone: 0113 244 0827

JRG Group
3 Crompton Way
North Newmoor Ind. Estate
Irvine, Ayrshire KA11 4HU
Tel: 0871 200 8080
Fax: 01294 211222
www.jrggroup.com

Aspen ASP20

Danesbury
Black DAN20BL
X1 Black X1B
Valencia VAL15

* JRG produce surrounds that are similar in appearance to those used in this brochure

Allwood Fireplaces Ltd
Units 3-4
Radnor Park Trading estate
Back Lane
Congleton
CW12 4XJ
Telephone: 01260 298868
Fax: 01260 298830

OER
Fireplace Works
Normacot Road
Longton
Stoke on Trent
Staffordshire ST3 1PN
Telephone: 01782 319350
Fax: 01782 593479
www.oerfireplaces.com

Selected furniture supplied by BoConcept, Bournemouth / The Furnishing Place, Maidenhead / David Mack, Bournemouth / The Pier, Bournemouth / David Phipps, Dorset / Quality Pine, Bournemouth.

Dimplex is a Registered Trade Mark in the United Kingdom.
All Optiflame fires are protected by patent nos GB2230335, AU621713, USA4965707, IE63651 and NZ232435.

All the products shown in this brochure are protected by intellectual property rights owned by Glen Dimplex UK Ltd or members of the Glen Dimplex Group on an international basis.

The Glen Dimplex Group of Companies will actively protect these rights.

© Glen Dimplex UK Limited
All rights reserved. Material contained in this publication may not be reproduced in whole or in part, without prior permission in writing of Glen Dimplex UK Limited.

Brochure designed and produced by CCA Limited, Christchurch (Bournemouth). Telephone: (01202) 499612.

Useful Numbers

Tel: 0845 600 5111
Fax: Customer Care: 01489 773053
Brochureline: 01489 773063
Main Reception: 01489 773050

Email: customer.services@glendimplex.com

Web: www.dimplex.co.uk

Please note – these phone numbers are charged at standard national rate, they are NOT premium rate numbers.